KU BOX V2 — 120mm Assembly and Installation Guide

AUG 2020

Special Features:

- Length:300,350,400,450,500,550mm.
- The drawer side-board is 120mm high.
- Drawer width can be designed freely with automatic error adjustment.
- Hidden full pullout silencing sliding skid can bear 35kg and enjoys
- excellent stability and quite and smooth sliding performance. Quick installation and dismantle.
- Newly-designed built-in damper is free from reinstallation and ensures soft and smooth drawer movements.

Basic length	Internally usable drawer depth	Minimum installation depth of drawer	Minimum installation height
300mm	274mm	300mm	142mm
350mm	324mm	350mm	142mm
400mm	374mm	400mm	142mm
450mm	424mm	450mm	142mm
500mm	474mm	500mm	142mm
550mm	524mm	550mm	142mm

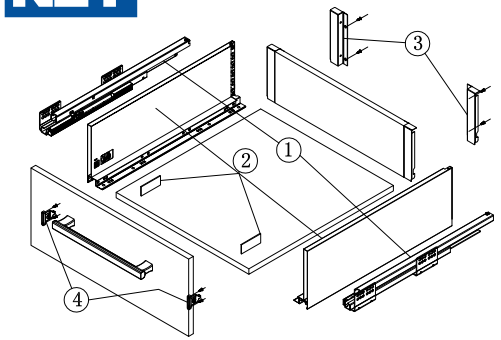

1. Guide Left/Right Length : 300mm 350mm 400mm 450mm 500mm 550mm



2.Drawer Side & Decorative Cap Left/Right Length: 300mm 350mm 400mm 450mm 500mm 550mm



3.Back connector Left / Right

4.Front connector Left / Right

Technology pivot:
Bottom and Back Panel Measurement
18MM Density Panel



LW:Inside Cabinet Width

1 Bottom panel width=Inside Cabinet Width-75±0.5
Bottom panel length=Runner length-10MM

2 Back panel height= 100MM
Back panel width=Inside Cabinet Width-87±0.5

Runner Installation(mm)

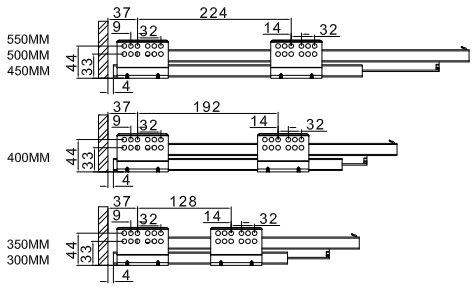

Basic length:300/350/400/450/500/550

Inside Cabinet Dimension



Front Panel Mounting Positions



B Side overlay(user-defined)

Front Fixing Brackets Positions



A.B Side overlay(user-defined)

Back Panel Mounting Positions



Front fixing brackets mounting





Front panel removing



1 Loosen the fastening screws
2 Rotation to dismantle the panel



Front panel height adjustment : ±2mm



Front panel side adjustment : right1mm



Front panel side adjustment : left1mm



Mounting the drawer









Installing the drawer







Removing the drawer



Push the metal spring part from the panel & pull out

Function of the damper







NEY Ltd
Stonebridge Trading Est
Sibree Road
Coventry
CV3 4FD

024 7630 8100
www.ney.co.uk
sales@ney.co.uk