

ASSEMBLY INFORMATION

for the



Push Open Piston Nickel

Contents:

- Parts Required 2
- Assembly of the Push Open Piston to Doors 3

Push Open Piston Nickel

Parts Required



Push latch



Push latch



Cross mounting plate



Linear mounting plate

Item number

Bronze

Push latch 915-0X59 > 381

Cross m. plate 915-4183 > 381

Linear m. plate 915-4175 > 381

915-0X59-381-K1




915-0X59-381-K2



200 Pcs


Made of steel and plastic

Fixing screws for mounting plates



Euro screws
821-6323-050

10000 Pcs




Chipboard screws

Push Open Piston Nickel


Assembly of the Push Open Piston to Doors

- Works with standard concealed hinges and drawers
- Effortless opening with just a light touch
- Depth adjustment ensures reliable closing and consistent performance in cases of inaccurate drilling
- 'Safety click' feature for easy detachment of the mechanism from the mounting plate


Drilling pattern

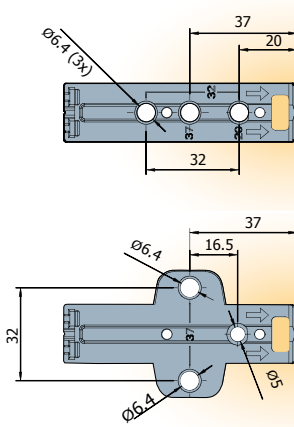


Dimensions

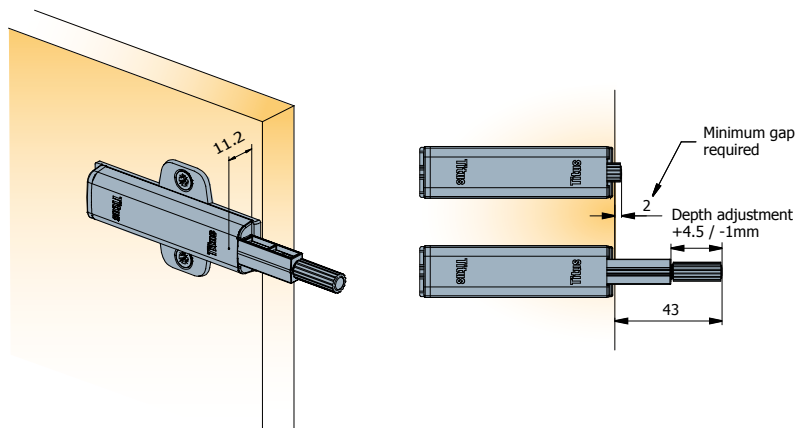


Positioning



Close to the 'touch opening point' on the side opposite to hinges



On the cabinet side; gap between drawer and cabinet side = min 12mm



On the drawer bottom; in the middle of drawer

Push latch works with standard hinges.

Push latch works on drawer; the gap between the drawer and the cabinet side = min. 12 mm



MACHINERY - MATERIALS - COMPONENTS - ADHESIVES - FOILS - PANELS - DOORS

NEY Ltd (Head Office)

Stonebridge Trading Estate
Sibree Road
Coventry
CV3 4FD

t 024 7630 8100
f 024 7630 8101
e sales@ney.co.uk

NEY Ireland

Unit 22 Blaris Ind Estate
Altona Road
Lisburn
BT27 5QB

t 028 92 673 000
f 028 92 672 999
e ireland@ney.co.uk

NEY Scotland

Block 2 Units 1-2-3
Bandeath Ind Est
Throsk, Stirling
FK7 7NP

t 01786 814 814
f 01786 814 812
e scotland@ney.co.uk